

BREATHING AIR COMPRESSORS

MCH-6

F.A.D. : 100 lpm

No. of Stages : 4


Op. Pressure : 200 and / or 300 Bar

Prime Mover : 3 kW Motor (1 or 3 Ph) or 5.5

HP Petrol Engine

Filling Connections : 1 or 2

Extra Options : AUTO STOP (all models),
AUTO DRAIN (Only Electric Motor Driven),
HOUR METER



EOLO 300

TYPE : LOW PRESSURE DIRECT BREATHING

F.A.D. / Op. Pressure. : 300 lpm / 8 Bar

No. of Stages / Cylinders: 1 / 3

Prime Mover : 2.2 kw Motor or 5.5 HP Petrol Engine

OPTIONAL : Low Pressure Breather Hose with
Regulator (for Diving) or Mask (for Surface Breathing)

ADDITIONAL : 2 user outlet

MCH-13/16/18/19 ELECTRIC

F.A.D. : 215 / 265 / 300 / 320 lpm

Op. Pressure : 200 and / or 300 Bar


No. of Stages : 3

Prime Mover : 4 / 5.5 / 7.5 kW Motor (3 Ph)

Filling Connections : 2 (More possible)

EXTRA OPTIONS : AUTO STOP, AUTO DRAIN,
HOUR METER, PUMP LUBRICATION

COMPACT OPEN: Built in Control Panel for
AUTO STOP, AUTO DRAIN & HOURMETER

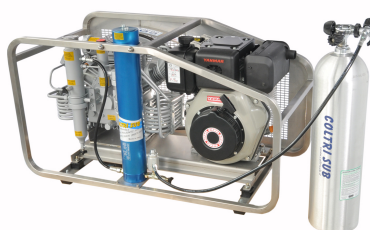

MCH-13/16/19 ENGINE

F.A.D. : 215 / 265 / 320 lpm

Op. Pressure : 200 and/or 300 Bar Pr.

No. Of Stages : 3 (Three)

Prime Mover : Honda Petrol or Yanmar Diesel Eng

Filling Connections : 2 (More also if desired)

EXTRA OPTIONS : AUTO STOP (For Petrol Engine only).
AUTO DRAIN / ELECTRIC START
(Possible with battery)

BREATHING AIR COMPRESSORS

MCH-13/16/18

(COMPACT / SUPER SILENT EVO)

F.A.D. : 215 / 265 / 300 lpm

Op. Pressure : 200 and / or 300 Bar

Elect. Motor : 4 / 5.5 / 7.5 kw 3 Ph 400 V

Filling Connections : 2 (or More)

CONTROL FEATURES : Built-in Control Panel
For AUTO STOP, AUTO DRAIN & HOURMETER,
I/S PR. GAGES, LOW OIL PROTECTION, HIGH TEMP
SHUTDOWN, REVERSE ROTATION PROTECTION etc..

NOISE LEVEL : Within 68-82 dBA

ACCESSORIES : PRESEC ,REMOTE PANEL, AIR BANK



MCH - 26/30/32/36/45

(OPEN / COMPACT / SUPER SILENT)

OPEN, COMPACT & SUPER SILENT Models

F.A.D. : 400/430/500/530/600/750 lpm

Op. Pressure : 200 to 300 Bar
(400 Bar Version also available)

Elect. Motor : 8 / 9 / 11 / 15 kw 3 Ph 400 V

Filling Connections : 4 (or More)

CONTROL FEATURES : Built-in Control Panel
for AUTO STOP, AUTO DRAIN and HOURMETER +
INTER STAGE PR. GAGE, LOW OIL PROTECTION,
HIGH TEMP & REVERSE ROTATION PROTECTION etc.

NOISE LEVEL : Within 78 dBA

ACCESSORIES : PRESEC, AIR BANK & REMOTE PANEL

NITROX

(MEMBRANES & LP COMPR)

Membrane System Uses:

220 V - 10 A Up to 20 years life. Produce from 21% to
40% Oxygen. Trimix system available.

F.A.D. : 1070 / 2140 / 2700 lpm

Elect. Motor : 7.5 / 15 / 18 kw

Op. Pressure : 10 Bar % MAX O2 : 40%

INCLUDES : LP Compressor, Filters, Heater,
L.P. Membrane Nitrox Generator with suitable attachments

